

Modular Contactors R40..., R63..

2-pole - 40A or 63A

- 40A or 63A (AC1)
- High power ratings, compact size, 2 modules (35mm)
- Climate resistant, ambient temperature: -40°C..+60°C
- Switching indicator

2-pole

Rated current 400V AC1 A	Heating Power		Motor	Type	Pack pcs.
	230V 1~ kW	400V 3~ kW	AC3 400V 3~ kW	NO NC coil V AC	
40	9	-	-	R40-20 24	6
40	9	-	-	R40-20 230	6
63	14,3	-	-	R63-20 24	6
63	14,3	-	-	R63-20 230	6



Ratings

Incandescent lamp
Fluorescent lamp
Fluorescent lamp (dual-connection)
Fluorescent lamp (parallel compensated)

	R40	R63
Incandescent lamp	25A / 5700W	35A / 8000W
Fluorescent lamp	32A / 3400W	52A / 5500W
Fluorescent lamp (dual-connection)	34A / 6300W	54A / 10000W
Fluorescent lamp (parallel compensated)	16A / 3100W	25A / 5100W

Power consumption of coil

AC operated
inrush VA
sealed VA
W

20 - 25
4 - 6
1,5 - 2,5

Cable cross section


Main connector
solid or stranded mm²
flexible mm²
Clamps per pole 1

2,5 - 25
2,5 - 16
1

Magnetic coil
solid or stranded mm²
flexible mm²
flexible with multicore cable end mm²
Clamps per pole 1

0,75 - 2,5
0,5 - 2,5
0,5 - 1,5
1

Dimensions

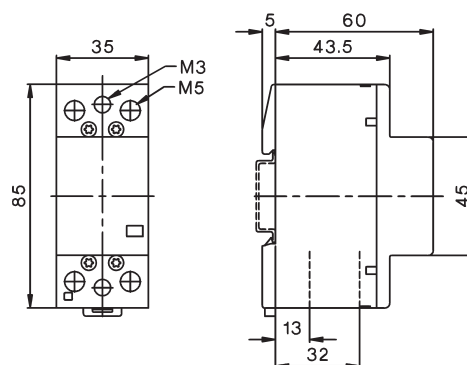

Technical data are subject to change without notice

Benedict GmbH
Liebiggasse 7, A-1220 Vienna

Tel.: +43 (1) 251 51-0
Fax: +43 (1) 251 51-89

e-mail: sales@benedict.at
www.benedict.at





NEWS

www.benedict.at